
COX

Research and Technology, Inc.

BOSSIER PENAL FARM
DUPLEX PUMP
CONTROL PANEL
FOR
OXIDATION POND
LS#4

Cox Research and Technology, Inc.
14697 S. Harrells Ferry Road
Baton Rouge, LA. 70816
(225) 756-3271 Fax (225) 755-1030

CP-1633

VOLTAGE	<u>277/480V</u>	(480V, 277/480V, 240V, 120/240V, 208V, 120/208V)
PHASE/HZ	<u>3/60</u>	
NO. MOTORS	<u>2</u>	
HP	<u>5</u>	
FLA	<u>9.0</u>	
TYPE OF PUMP	<u>Submersible</u>	(Self-Priming, Submersible)
MANUFACTURER	<u>Vaughn/Reliance</u>	
CATALOG NUMBER	<u></u>	
CONTROL VOLTAGE	<u>120V</u>	(120V, Other)
ENCLOSURE	<u>NEMA 3R</u>	(NEMA 1, NEMA 3R, NEMA 4, NEMA 4X)
ENCLOSURE MATERIAL	<u>Painted Steel</u>	(Painted Steel, Stainless Steel, Fiberglass)
CONTROL SENSOR	<u>Floats</u>	(Floats, Bubbler, Other)
CAPACITORS	<u>No</u>	(Yes, No)
CAPACITOR WIRING FIGURE	<u>N/A</u>	
THERM. & SEAL FAIL WIRING FIGURE	<u></u>	


OPTIONS:

SEAL FAIL LIGHTS	<u>X</u>	(Submersible Only)
SEAL FAIL RELAYS	<u>X</u>	(Submersible Only)
SEAL FAIL PUMP SHUTDOWN	<u>X</u>	(Submersible Only)
HT PUMP SHUTDOWN	<u>X</u>	(Self-Primer, Submersible)
ALARM HORN	<u></u>	
ALARM LIGHT	<u>X</u>	
LIGHT PANEL MTD	<u>X</u>	
LIGHT REMOTE MTD	<u></u>	
LIGHT FLASHER	<u></u>	
LIGHTNING ARRESTER	<u>X</u>	
ELAPSED TIME METER	<u>X</u>	
PHASE MONITOR	<u>X</u>	
NEMA RATED STARTERS	<u></u>	
GROUND FAULT RECPT.	<u>X (8A MAX)</u>	
GREEN RUN LIGHTS VS. RED	<u></u>	
POLE, BOX, SEAL	<u></u>	
INTRINSICALLY SAFE RELAYS	<u></u>	
HIGH TEMP. LOCKOUT, MANUAL RESET	<u></u>	
ECONOMY VERSION	<u>X</u>	


SOLD TO: Delta Process - Bossier City, LA
TAG : Bossier Penal Farm
Oxidation Pond

SHIP TO: Delta Process - Shreveport, LA

	Drawing Title						
	PANEL DESCRIPTION						
DATE		REFERENCE DRAWING	NO.	REVISION-LOCATION	ECN	DATE	BY
8/15/03		S/N	Sales Engineer C.C.	Application Engineer R.C.	DRAWN BY C. RACHAL	APPROVED BY	DATE
	Project Title	<div>COX</div> <div>Research and Technology, Inc.</div>			P.O. Box 77808 Baton Rouge, LA 70809	PURCHASE ORDER NUMBER	
	DUPLEX PUMP				Ph. (225)756-3271	DRAWING NUMBER	
	CONTROL PANEL				Fax (225)756-1030	CP-1633	
						SHEET NUMBER	
						1	

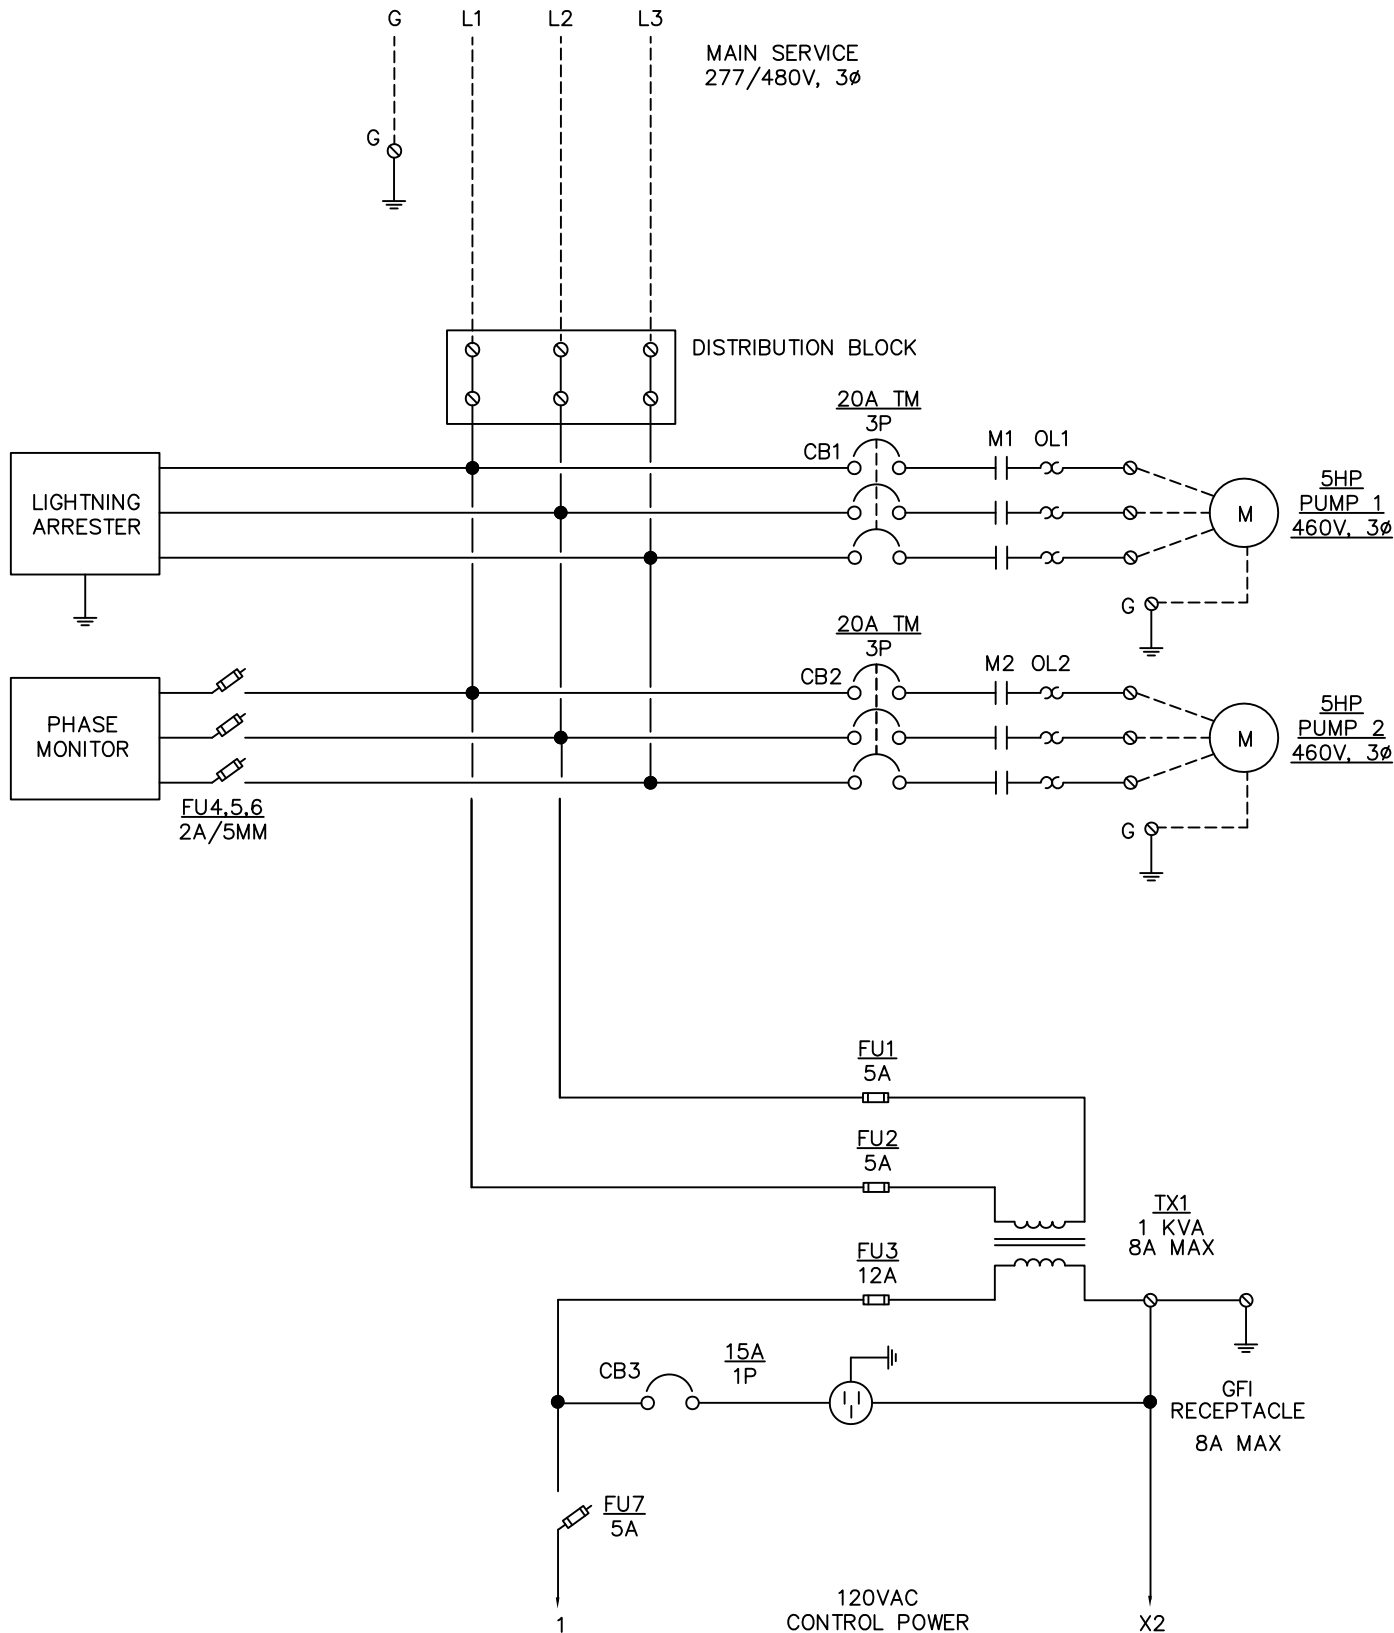


	Drawing Title								
	POWER DIAGRAM								
DATE 8/15/03		REFERENCE DRAWING S/N	NO. Sales Engineer C.C.	REVISION-LOCATION Application Engineer R.C.	DRAWN BY C. RACHAL	ECN	DATE	BY	APPROVED
	Project Title	COX				PURCHASE ORDER NUMBER		DRAWING NUMBER CP-1633	
	DUPLEX PUMP CONTROL PANEL	Research and Technology, Inc.				P.O. Box 77808 Baton Rouge, LA 70809		SHEET NUMBER 2	
						Ph. (225)756-3271 Fax (225)756-1030			

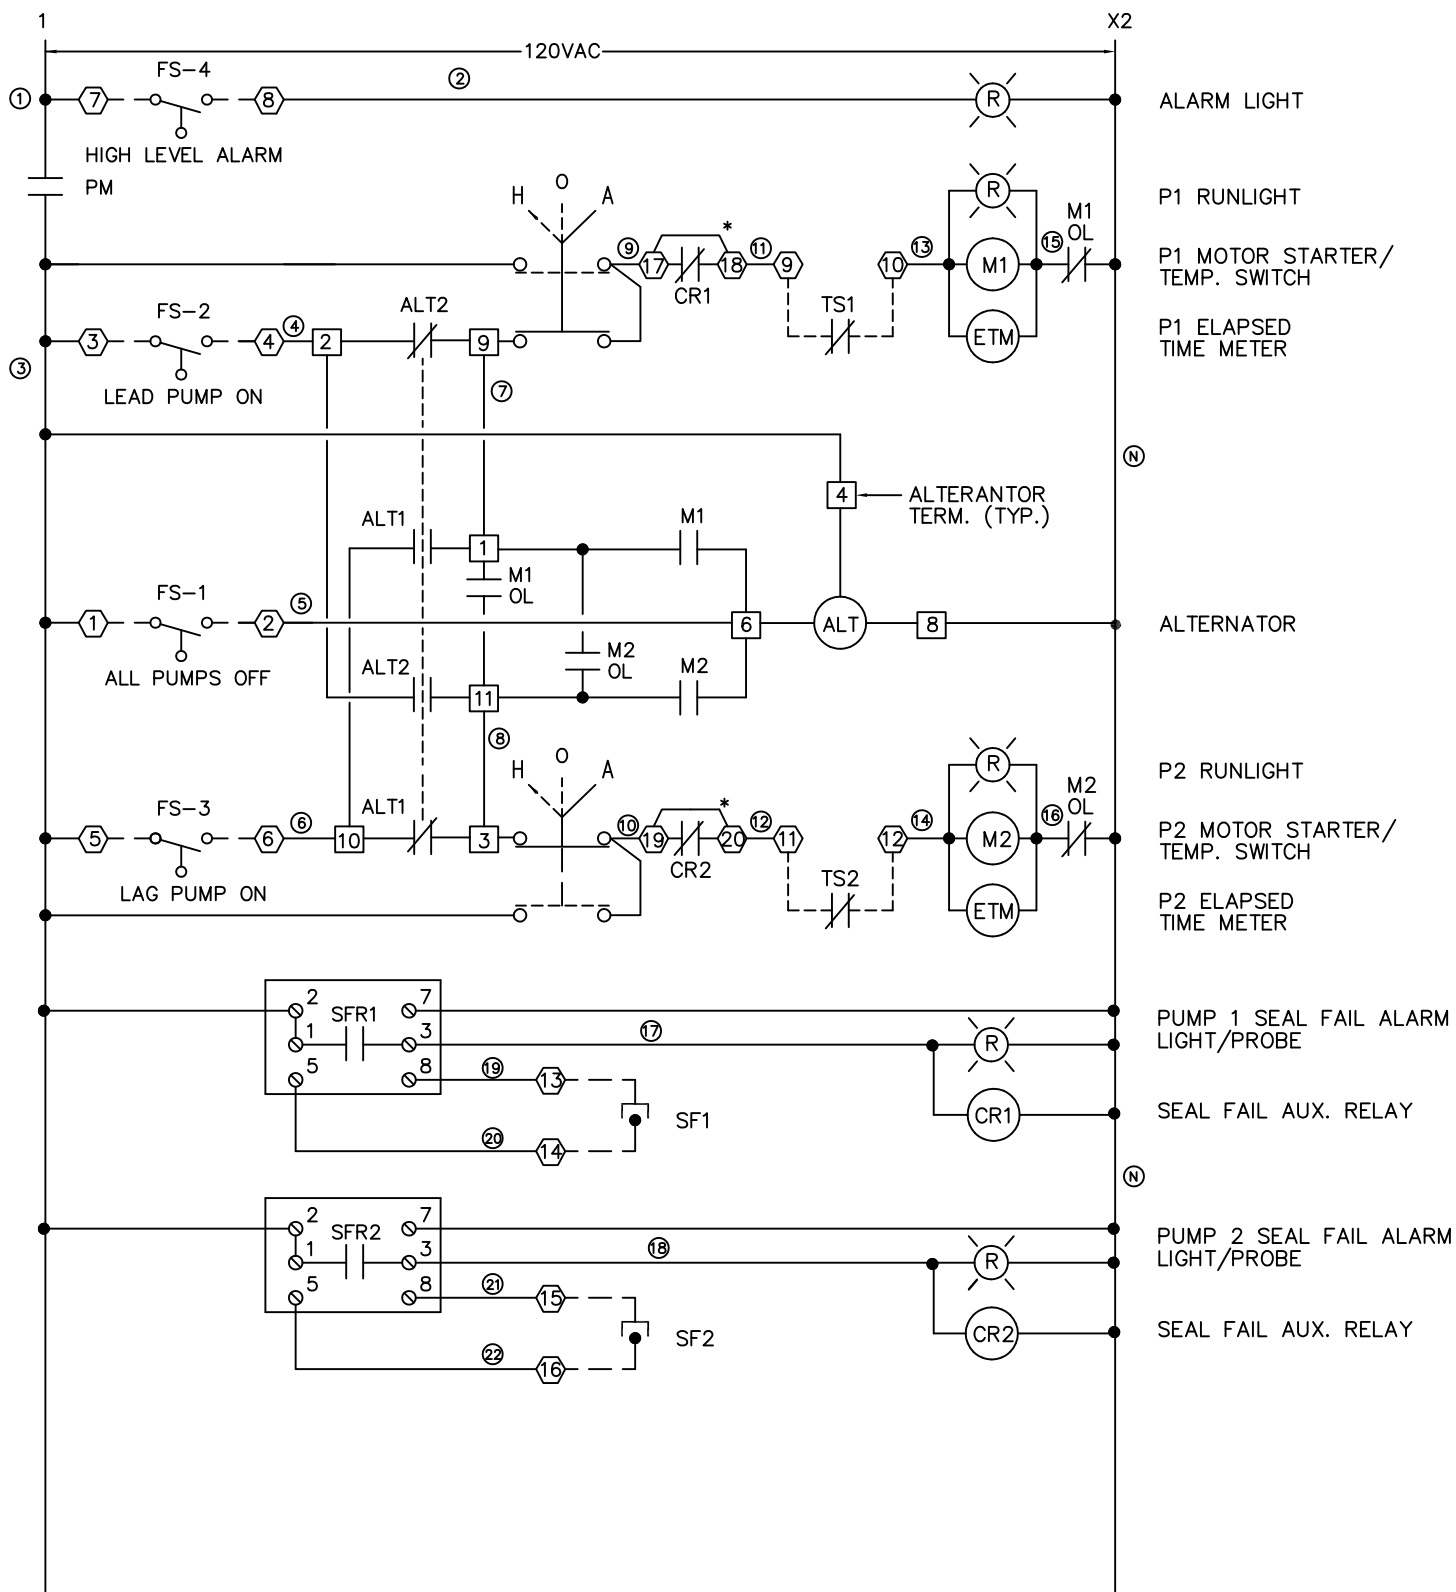

* REMOVE JUMPER IF SEAL FAIL LOCKOUT IS PREFERRED.

	Drawing Title CONTROL DIAGRAM								
DATE 8/15/03			REFERENCE DRAWING		NO.	REVISION-LOCATION		ECN	DATE
	S/N	Sales Engineer C.C.	Application Engineer R.C.		DRAWN BY C. RACHAL		APPROVED BY DATE		
	Project Title DUPLEX PUMP CONTROL PANEL		<div>COX</div> <div>Research and Technology, Inc.</div>			P.O. Box 77808 Baton Rouge, LA 70809 Ph. (225)756-3271 Fax (225)756-1030		PURCHASE ORDER NUMBER	
DRAWING NUMBER CP-1633									
SHEET NUMBER									
3									

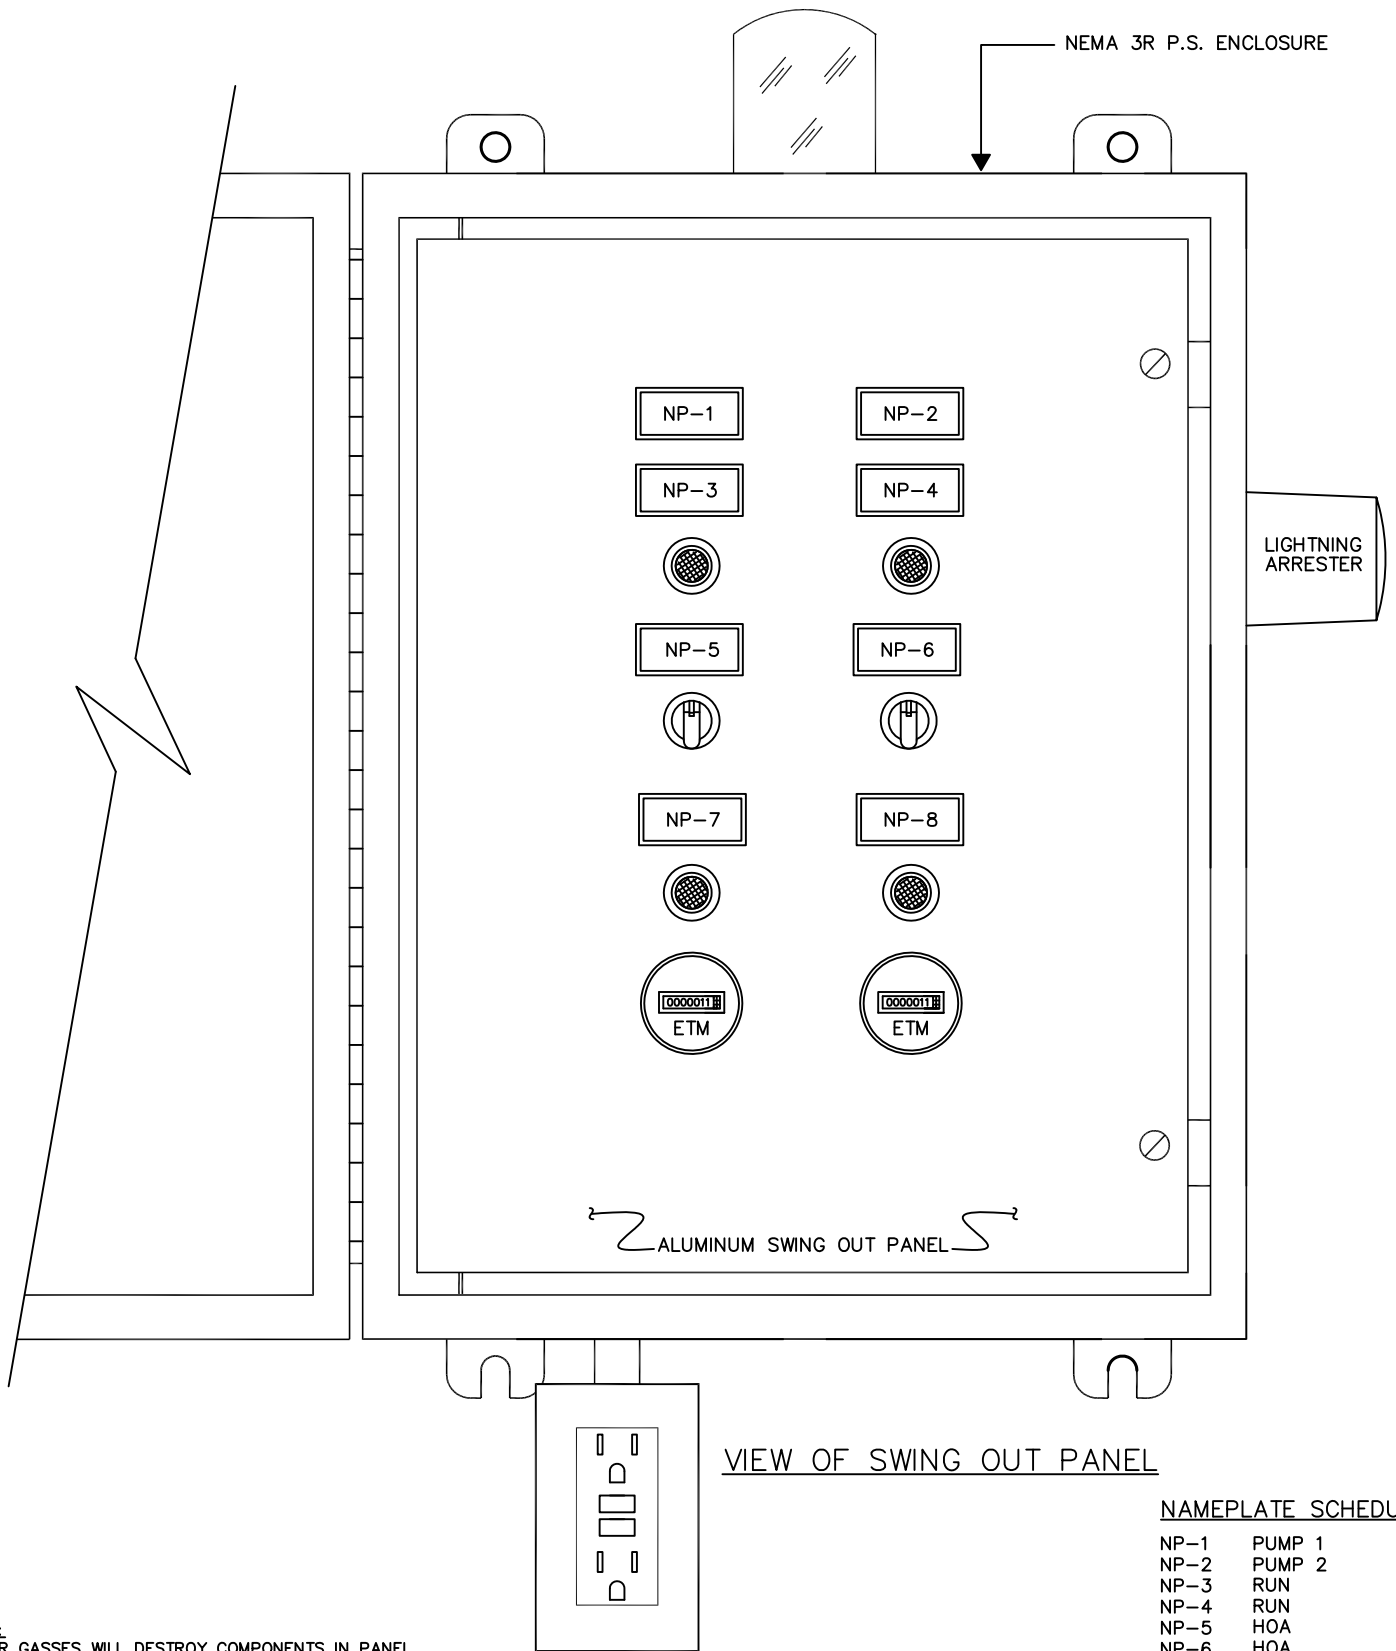

NOTE:
SEWER GASSES WILL DESTROY COMPONENTS IN PANEL.
PROPER SEALS MUST BE INSTALLED EXTERNAL TO THE
PANEL TO PREVENT ENTRY OF GASSES.

NAMEPLATE SCHEDULE

NP-1	PUMP 1
NP-2	PUMP 2
NP-3	RUN
NP-4	RUN
NP-5	HOA
NP-6	HOA
NP-7	SEAL FAIL
NP-8	SEAL FAIL

DATE 8/15/03	Drawing Title								
	ENCLOSURE								
		REFERENCE DRAWING		NO.	REVISION-LOCATION		ECN	DATE	BY
		S/N	Sales Engineer C.C.	Application Engineer R.C.	DRAWN BY C. RACHAL		APPROVED BY		DATE
	Project Title				PURCHASE ORDER NUMBER				
	DUPLEX PUMP CONTROL PANEL	<div>COX</div> <div>Research and Technology, Inc.</div>			P.O. Box 77808 Baton Rouge, LA 70809		DRAWING NUMBER CP-1633		
					Ph. (225)756-3271 Fax (225)756-1030		SHEET NUMBER 4		

BILL OF MATERIAL

ITEM	QTY	MANUFACTURER	PART NO.	DESCRIPTION
1	1	EBE	302410REPL	ENCLOSURE
1a	1	EBE	A3024P	BACKPLATE
1b	1	EBE	A3024SP	DEAD FRONT
2	2	ABB	A16-30-10-84	MOTOR STARTER
3	2	ABB	TA25DU11	O.L. RELAY (7.5-11A)
4	2	ABB	S1N020TL	CB1, CB2
5	1	TIMEMARK	261DT120	ALTERNATING RELAY
6	4	ACI	JR22FR	RED PILOT LIGHT
7	2	ACI	JR22P3M20B	HOA SWITCH
8	1	AC/DC	BL5-R-120	ALARM LIGHT
9	2	SSAC	LLC54AA	SEAL FAIL RELAY
10	2	OMRON	G2R2SAC120	RELAY
11	1	SSAC	PLMU11	PHASE MONITOR
12	1	CUTLER HAMMER	CHSA03	LIGHTNING ARRESTER
13	2	GRASSLIN	UWZ52E	ETM
14	1	SQUARE D	QOU115	CB3
15	1	STOCK		GFI
16	1	BUSS	16371-3	DISTRIBUTION BLOCK
17	1	BUSS	CPDB-3	DIST. BLOCK COVER
18	1	SQUARE D	9070TF1000D1	TRANSFORMER
19				
20				
21				
22				

	Drawing Title							
	<h2 style="margin: 0;">BILL OF MATERIALS</h2>							
DATE 8/15/03		REFERENCE DRAWING S/N	NO. Sales Engineer C.C.	REVISION-LOCATION Application Engineer R.C.	DRAWN BY C. RACHAL	ECN	DATE	BY
		<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <h1 style="margin: 0;">COX</h1> <p style="margin: 0;">Research and Technology, Inc.</p> </div> <div style="text-align: left;"> <p>P.O. Box 77808 Baton Rouge, LA 70809</p> <p>Ph. (225)756-3271 Fax (225)756-1030</p> </div> </div>			APPROVED BY DATE			
	Project Title	<div style="display: flex; justify-content: space-between;"> <div style="width: 40%;"> <h2 style="margin: 0;">DUPLEX PUMP CONTROL PANEL</h2> </div> <div style="width: 50%; text-align: right;"> <p>PURCHASE ORDER NUMBER</p> <hr/> <p>DRAWING NUMBER CP-1633</p> <p>SHEET NUMBER 5</p> </div> </div>						